

Oxford[®]



Classic Lifts



Oxford's ALL NEW Classic range of mobile lifts

"Design expertise meets outstanding performance".

Our latest designs bring together over 40 years of design and development to bring you our most functional and high performing mobile lift range ever.

Accommodating a variety of needs, the Classic range is ideally suited to home care and nursing home environments, where our products have been leading the way for decades.

Special attention to detail has been given to each lift, ensuring they are the safest, most intuitive to use on the market today. As with all of our products, the Classic range has undergone rigorous design, development and testing to ensure they are the perfect partner for a demanding work environment.



Leading the way

We are proud to announce a design and technology first within this new range. Each Classic lift incorporates our unique, Smart™ Monitor, a control system that enables a user to know exactly how the lift is being used during every second of every day.



Additionally, the system advises the user to schedule key maintenance routines to help ensure the product is always in optimum condition, increasing safety and prolonging life-cycle. This level of data ensures the Oxford Classic range is a true leader in its field.

With such an array of functionality, the Classic mobile lift range can be used in all aspects of patient handling.

Key design considerations

Our newly designed lifts take into account the safety and welfare of both patient and carer. Particular consideration has been given to ergonomics, including a newly designed, over-sized push handle, an easy to use, foot pedal mechanism for leg adjustment as well as a range of spreader bar sizes to accommodate patient specific needs.



The Oxford Classic mobile lift range:

- Oxford **Mini 140** (SWL 140kgs) (Electric / Hydraulic)
- Oxford **Midi 180** (SWL 170kgs) (Electric / Hydraulic)
- Oxford **Major 200** (SWL 200kgs) (Electric / Hydraulic)
- Oxford **Maxi 170** (SWL 180 kgs) (Electric only)

"Dependable, high performing and value orientated - this is a product range you can count on".

Product Highlights

The NEW Oxford Classic range incorporates a number of newly designed features as follows.



NEW Spreader Bars

Fully interchangeable and available in a choice of three sizes to suit a variety of patient sizes.



NEW Smart™ Monitor

A state-of-the-art, on-board diagnostic tool that provides invaluable operational data for both the user and service engineer.




NEW Emergency Descent

Manual emergency descent function for added safety.




NEW Push Handle

Optimised position for ease of handling and manoeuvrability.

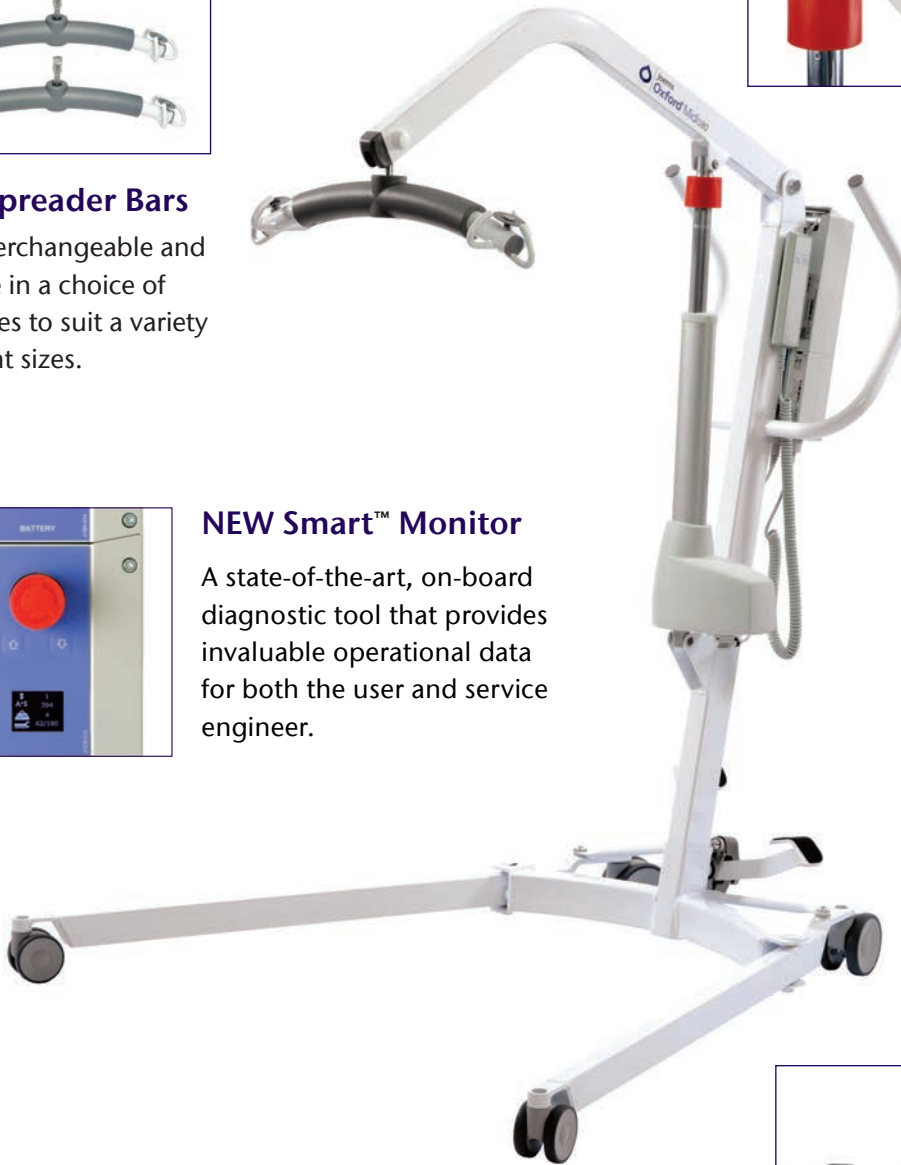

NEW High Grade Castors

Highly durable design that aids manoeuvrability, particularly when transferring a patient.

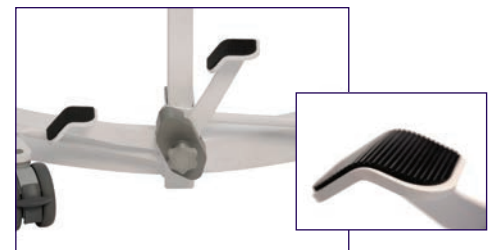

NEW Foot Pedal Leg Adjustment

Easy to operate with a 'carer friendly' ergonomic design, the legs lock into position avoiding in-advertent opening.

Technical specifications

| Specification | Mini 140 | Midi 180 | Major 200 | Maxi 180 |
|--------------------------------------|----------------|----------------|----------------|----------------|
| Safe Working Load | 140 kg (22 st) | 180 kg (27 st) | 200 kg (30 st) | 180 kg (27 st) |
| Length | 1175 mm | 1225 mm | 1300 mm | 1315 mm |
| Maximum Overall Height | 1730 mm | 1840 mm | 1930 mm | 2150 mm |
| Minimum Overall Height | 1230 mm | 1240 mm | 1380 mm | 1560 mm |
| Maximum Spreader Bar Height | 1545 mm | 1660 mm | 1725 mm | 1970 mm |
| Minimum Spreader Bar Height | 530 mm | 525 mm | 525 mm | 780 mm |
| Spreader Bar Height at Maximum Reach | 1000 mm | 1060 mm | 1200 mm | 1420 mm |
| Spreader Bar Reach at Maximum Height | 400 mm | 420 mm | 630 mm | 550 mm |
| Spreader Bar Reach at Minimum Height | 400 mm | 440 mm | 490 mm | 540 mm |
| Maximum Reach | 565 mm | 655 mm | 720 mm | 730 mm |
| Turning Radius | 1150 mm | 1235 mm | 1310 mm | 1310 mm |
| Legs Open - External Width | 1050 mm | 1170 mm | 1230 mm | 1230 mm |
| Legs Open - Internal Width | 1000 mm | 1070 mm | 1140 mm | 1140 mm |
| Legs Closed - External Width | 600 mm | 600 mm | 660 mm | 660 mm |
| Legs Closed - Internal Width | 540 mm | 540 mm | 580 mm | 580 mm |
| Overall Height of Legs | 100 mm | 100 mm | 100 mm | 100 mm |
| Ground Clearance | 25 mm | 25 mm | 15 mm | 15 mm |
| Front Twin Castors | 75 mm | 75 mm | 75 mm | 75 mm |
| Rear Braked Castors | 100 mm | 100 mm | 100 mm | 100 mm |

| Weights | Mini 140 | Midi 180 | Major 200 | Maxi 180 |
|------------------------|----------|----------|-----------|----------|
| Mast and Boom Assembly | 17.5 kg | 20.5 kg | 23 kg | 24 kg |
| Base Assembly | 11 kg | 11.5 kg | 19 kg | 19 kg |
| Total | 28.5 kg | 32 kg | 42 kg | 43 kg |

Specifications may vary due to manufacturing tolerances

Electrical Specifications

Battery 1 X 12 volt rechargeable sealed lead acid type
 Battery capacity 3.2 Ampere hours
 Charger rated input 230Vac 50/60Hz
 Charger rated output 27.4/29.0 VDC@0.8A

Warranty

Oxford Classic lifts come with a 12 month warranty as standard.
 Please refer to your user manual for further information.

Electrical Shock Protection

Charger - Class II
 Lift - Internal Power Source

Degree of shock protection
 Charger - Type B
 Lift - Type B
 Intended operating environment: >+5° <+40°
 Outside this environment functionality and safety may be compromised



Oxford®



Joerns Healthcare Limited
 Drakes Broughton Business Park, Worcester Road, Drakes Broughton
 Pershore, Worcestershire, WR10 2AG United Kingdom
 (T) +44 (0) 844 811 1156 (F) +44 (0) 844 811 1157
 www.joerns.co.uk • email: info@joerns.co.uk